



AC to DC Converter & Charger

AC to DC CONVERTER & CHARGER

SRV "STANDALONE" RV SERIES

55 and 75 Amp models

KEY FEATURES


- Ideal electrical center for RV use
- 55, 75 amp DC current models
- 105-130 Input VAC operation
- > 85% Efficiency
- < 1% Load Regulation
- Quiet Fan Cooling
- UL and C-UL certified. EMI: FCC-15
- Over-temp, over-current protection
- Reversed battery protection
- Safe, cool, quiet & reliable operation
- Filtered Converter / Charger power
- 2 Year Limited Warranty



Fortron Power technology integrates safe, cool, reliable converter/charging operation in a compact design weighing six pounds. The Converter/Charger safeguards against damage with over-temperature, over-current and reversed battery protection. Filtered power ensures smooth optimum DC operation. The thermostatically controlled fan reduces noise and improves performance in warmer environments. The full output power is available for battery charging.

SPECIFICATIONS


ELECTRICAL

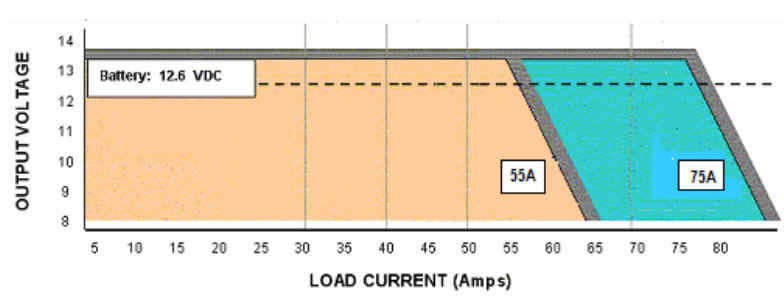Input Voltage	105 – 130 VAC	Output Voltage Load Curve 
Input Frequency	58 – 62 Hz	
Input Current	(max values)	
<ul style="list-style-type: none"> ▶ Model SRV 55 ▶ Model SRV 75 	12 amps 15 amps	
Ripple and Noise (max)	200mv peak to peak	
Output Current-13.6vdc		
<ul style="list-style-type: none"> ▶ Model SRV 55 ▶ Model SRV 75 	55 amps 75 amps	
Output Voltage	13.6 +/- 0.1 VDC	



MECHANICAL

All dimensions are *Inches (mm)* unless specified otherwise.

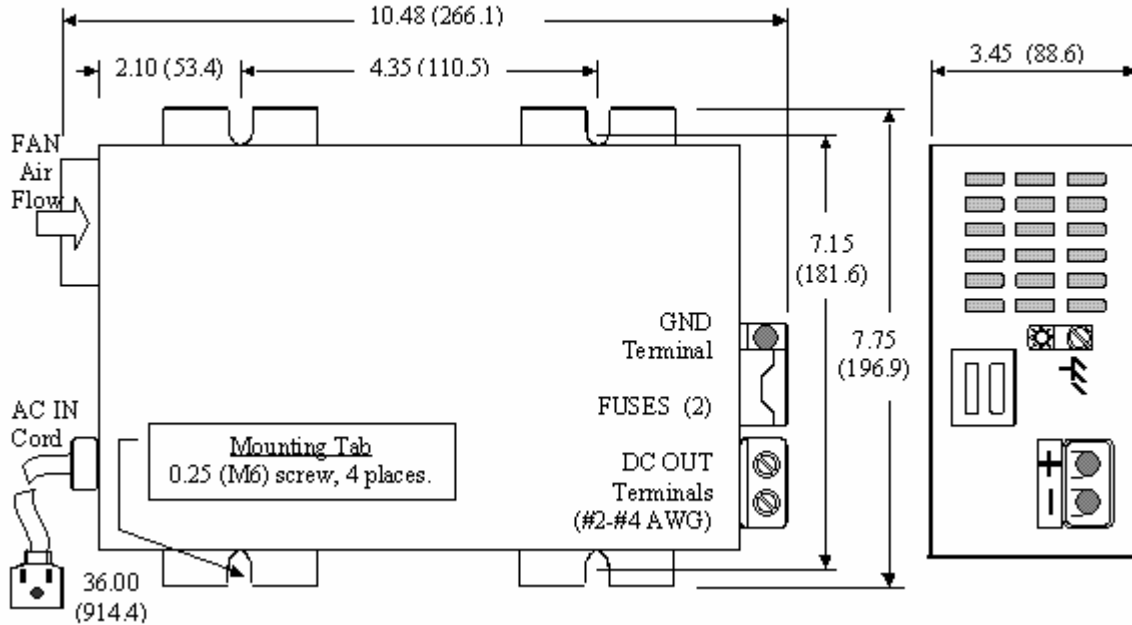

Certifications: UL: UL, C-UL. EMI: FCC – 15

Warranty 2 years

Shipping Weight 6 pounds



- 23181 Antonio Parkway • Rancho Santa Margarita • CA 92688 • USA •
- Corporate Office: (949) 766-9240 • Fax: (949) 766-9241 •
- E-Mail: sales@fortronpower.com • Web: www.fortronpower.com •